


Installation Instructions

1. Remove pressure hose from out-put of pressure gun (mounted on extension pole).
2. Loosely install valve mounting clamp, approximately 1 ft. away from trigger gun on extension pole (use mounting plate, nuts & bolts provided)
3. Attach pressure hose from valve mounting clamp, to out-put of trigger gun (tighten bolts on mounting plate to secure).
4. Reattach original pressure hose, from the trigger gun out-put, to the street elbow located on valve mounting clamp.
5. Make sure bypass tube is facing away from extension pole. Secure bypass tube to extension pole, using the zip-tie provided.
6. Mount the 1 ft. wand with the quick couplers at the end of the extension pole. This wand has a greater bend than the one that comes from the manufacturer.

Valve assembly comes pre-assembled with grip handle set-up on left hand side of pole, facing outward. Grip handle can be set up on the right hand side of pole facing outward by:

- a) Remove 1 ft. bypass tube from valve assembly clamp
- b) Remove street elbow from valve assembly clamp
- c) Remove hose from assembly clamp
- d) Install valve through the other side of assembly clamp
- e) Reverse directions a, b & c (Street elbow should always be installed on opposite side of grip handle).

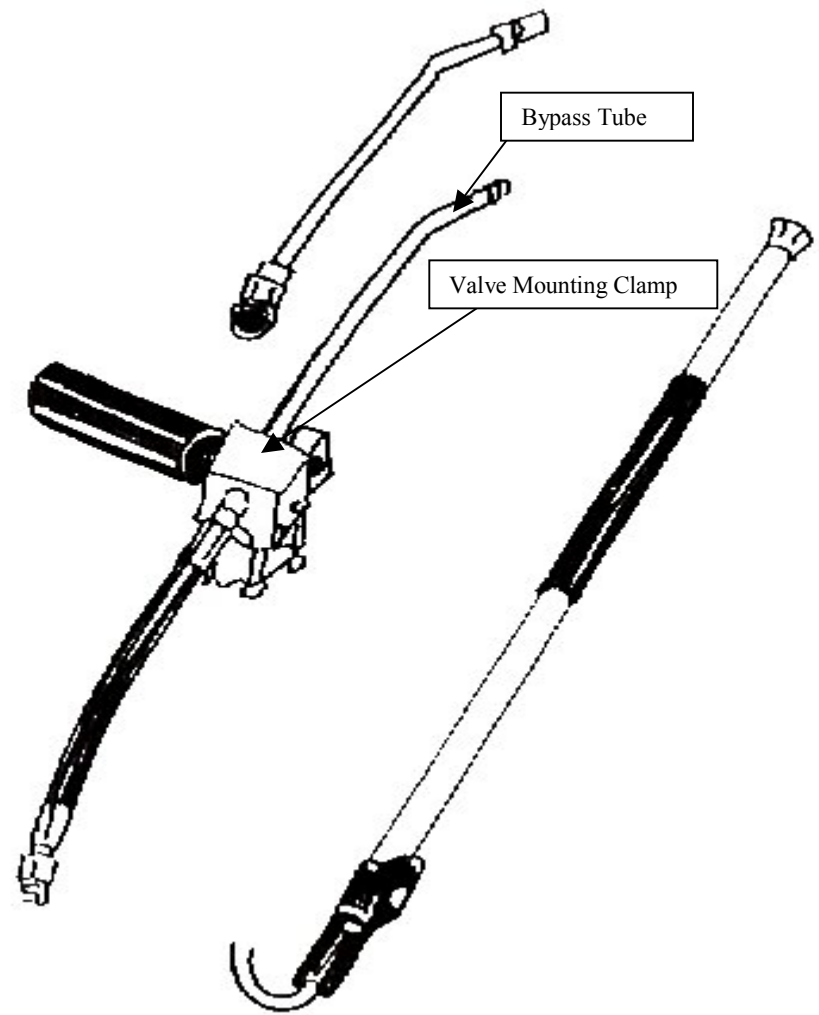

Ultimate āsher, Inc.

Takes no responsibility for damages caused by miss-use or miss-handling of this product. Follow all assembly instructions.

For Professional Use Only